

■ TECHNICAL DATA SHEET ■


## Copper

### DESCRIPTION

Bare, annealed copper foil.

### FEATURES

Excellent shielding level and protection from external electromagnetic interference.

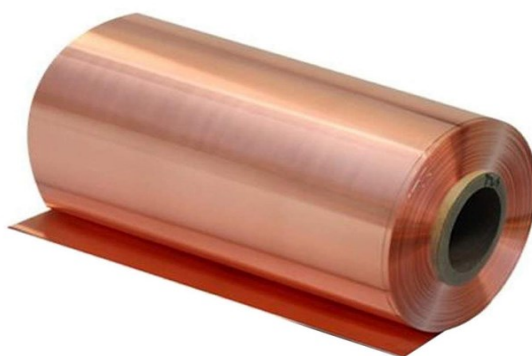

### TECHNICAL PROPERTIES

Thickness (μm)	Tolerance	Weight (g/m <sup>2</sup> )	Yield (m <sup>2</sup> /kg)	Minimum elongation (%)	Max. tensile strength
10	±10% (or -10% on request)	89	11	2%	260 MPa
12		107	9	3%	
15		134	7	4%	
18		160	6	5%	
20		178	6	6%	
25		223	4		
30		267	4	7%	
35		312	3		
40		356	3	8%	
45		401	2		
50		445	2	10%	
70		623	2	12%	
80		712	1		
100		890	1	15%	

Where not indicated tolerance ± 10%

### DISCLAIMER

The above information is believed to be reliable and accurate but is presented without a guarantee on our part.  
Pietro Galliani gives no warranty as to the fitness of the above product for any particular purpose and any implied warranty or condition statutory or otherwise.  
It is recommended to make a trial before any bulk usage.  
The material is being sold under the terms of the General Sales Conditions of Pietro Galliani.

Quality Management System certified according to ISO 9001:2015

Unauthorized reproduction, copying, distribution or any other use of the whole or any part of this documentation is strictly prohibited - Sono proibite, anche solo parzialmente, la riproduzione, l'elaborazione, la distribuzione e altri tipi di utilizzo.

### Pietro Galliani S.p.A.

Registered office:  
Via Molino Malpasso, 65 -  
40038 Vergato (BO) - Italy  
Operational headquarters:  
Loc. Campiario, 131 - 40030  
Grizzana Morandi (BO) - Italy

VAT no. 00640581203  
Fiscal code no. 03597040371

Tel. +39 051-6740082  
Fax +39 051-9711062  
pietrogalliani@pietrogalliani.com  
[www.pietrogalliani.com](http://www.pietrogalliani.com)

